


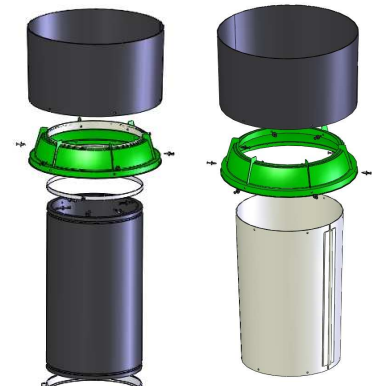

<b>CHIMNEY SET 35</b>	<b>A3440038</b>
<b>CHIMNEY SET 40</b>	<b>A3440039</b>
<b>CHIMNEY SET 45</b>	<b>A3440040</b>
<b>CHIMNEY SET 50</b>	<b>A3440041</b>
<b>CHIMNEY SET 50 CLICK</b>	<b>A5440304</b>
<b>CHIMNEY SET 50 CLICK ISO.</b>	<b>A5440413</b>
<b>CHIMNEY SET 56</b>	<b>A3440042</b>
<b>CHIMNEY SET 56 CLICK</b>	<b>A5440305</b>
<b>CHIMNEY SET 56 CLICK ISO.</b>	<b>A5440414</b>

**Contents**

Applications _____	1
Features _____	1
Dimensions _____	2

**Applications**


Air chimney through the roof construction.

**Features**

- The chimney set contains a rain ring, base and a conical duct from 0,9 mtr.  
ATTENTION: ROOFPLATE OR BACKDRAUGHT SHUTTER ARE NOT INCLUDED, THEY MUST BE ORDERED SEPARATE.
- The parts are made of high quality polyethylene. It retains its shape and is resistant to all kinds of aggressive substances present in agricultural buildings.
- Parts are UV-resistant.
- The diameter corresponds to the sizes of Fancom modular ventilation systems.
- No roof soiling thanks to the sophisticated water drainage system.
- 5% increase in capacity in comparison to a straight chimney.
- Exterior colour: black with green strip under the rain protection ring.
- Interior colour: grey.
- For diameters 50 and 56 also insulated chimneys made of PUR are available, these have a length of 1 mtr and are not conical. For more details please look at the special PAM 12-27 for insulated chimneys 50-80 cm.



Dimensions

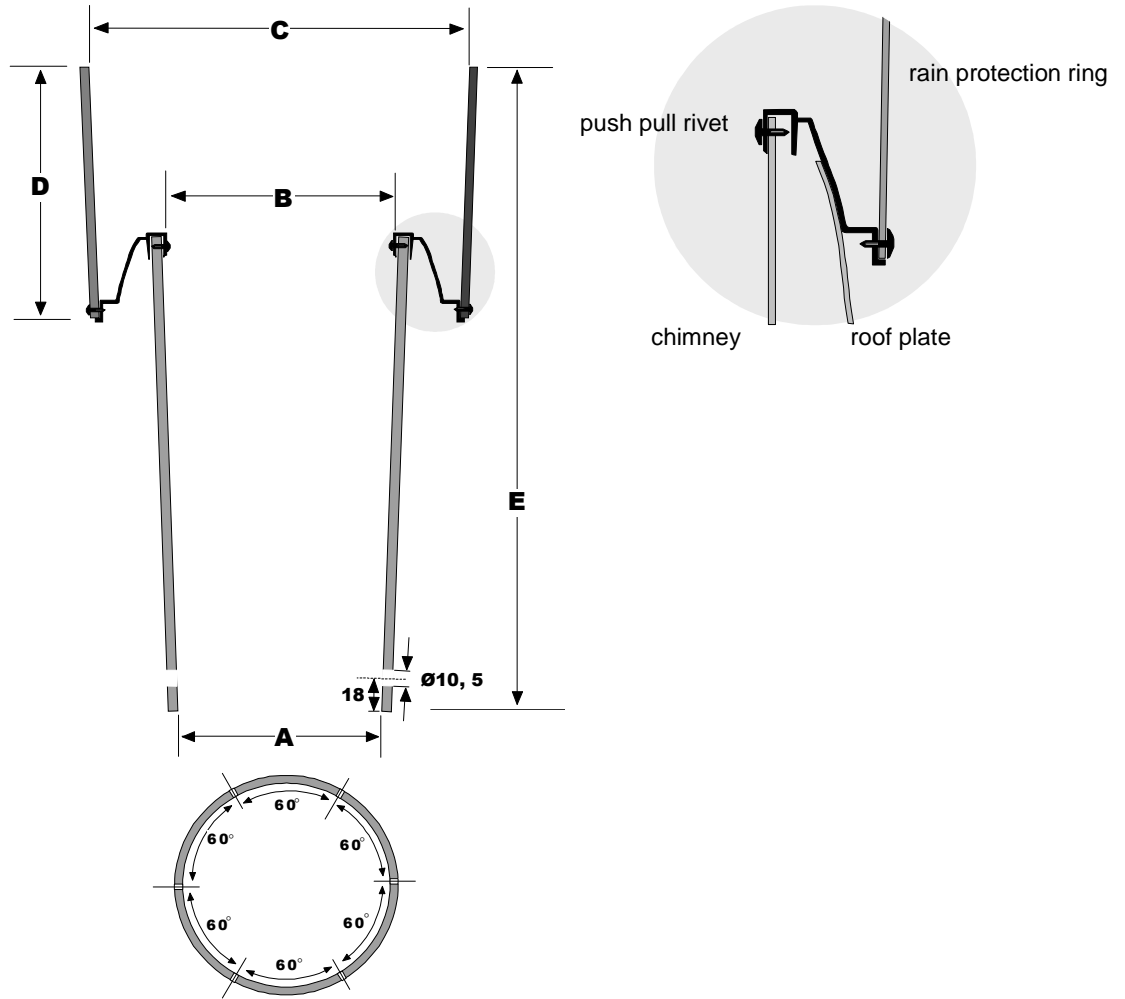

Type	A Inside diam. of chimney to be con- nected [mm]	B Inside diame- ter [mm]	C Inside diameter rain protec- tion ring [mm]	D Height rain protection ring [mm]	E Total height chimney [mm]
35	354	404	806	450	1220
40	404	454	806	450	1220
45	452	502	806	450	1220
50	502	552	806	450	1220
50 click	504	552	806	450	1220
50 click iso	520	520	806	450	1320
56	562	612	806	450	1220
56 click	564	612	806	450	1220
56 click iso	563	563	806	450	1320